

SCISSOR LIFT HD SERIES

SPS0608HD

Compliant with CE standards



Safe



Efficient



Intelligent

Intelligent

- Interactive display for real-time monitoring and work status
- Automatically displays fault codes for fast, convenient equipment management

Modular Design

- Modular design adopted for the entire product line
- Part commonality exceeds 90%

Refined

- State of the art manufacturing process with exceptional quality control
- Optimized hose and harness layout for convenient maintenance

Reliable

- E-coat and powder coating provide a durable and rust-free finish
- IP67 rated electrical components
- Fully sealed DC motor increases efficiency while reducing maintenance costs

Efficient & Worry-free

- 250kg platform capacity allows more work to be done
- Fully sealed DC motor increases efficiency while reducing maintenance costs
- Standard forklift pocket for secure loading and unloading
- Swing out doors on both sides for easier maintenance



Telescopic work platform



Standard forklift slot



250kg large load



Swing out battery compartment



Refined layout



IP67 rated components

Standard Configuration

- GPS
- Proportional controls
- Multi-purpose alarm
- Flashing amber beacon
- Self-closing swing gate
- Automatic pothole protection
- Emergency descent system
- Emergency stop button
- Fault diagnosis system
- Tilt protection system
- Fully mobile
- Platform extension
- Charging protection system
- Safety prop
- Standard fork pocket



◆ All products of the Sany aerial work platform series comply with CE standards

This printed matter is not part of the contract and does not constitute a component of the vehicle purchase contract. Due to continuous product improvement, we reserve the right to change product models, specifications, and configurations without prior notice. The pictures are for reference only, and the actual product shall prevail. The products in the pictures may have non-standard configurations, and some components may need to be purchased separately. (Within the scopes permitted by law, Sany has the final interpretation right)
Copyright version on 2024 January




SCISSOR LIFT HD SERIES

SPS0608HD

Compliant with CE standards



Model	SPS0608HD(SPS1932HD)	
	Metric	Imperial
Dimensions		
Working height max.	7.80m	25ft7in
A-Platform height max.	5.80m	19ft
B/C-Length machine - with/without ladder	1.88m/1.71m	6ft2in/5ft7in
D-Width	0.81m	2ft8in
E-Machine height	2.15m	7ft1in
Machine height - rails folded	1.78m	5ft10in
F - Platform length - outside	0.60m	1ft11in
G - Wheelbase	1.38m	4ft6in
H/I - Ground clearance - pothole guards retracted/deployed	85mm/17mm	3.3in/0.7in
Platform dimension (L × W × H)	1.71m × 0.74m × 1.12m	5ft7in × 2ft5in × 3ft8in
Performance		
Max. platform occupancy (in/out)	2/0	
Lift capacity	250kg	550lb
Lift capacity - extension deck extended	120kg	265lb
Drive speed - stowed/raised	3/0.8(km/h)	1.9/0.5(mph)
Turning radius - inside/outside	0.4m/1.7m	1ft4in/5ft3in
Lifting motor	3.5kW	
Gradeability - stowed	25%	
Tilt sensor activation (side to side /front to back)	1.5° /3°	
Tires - solid non-marking	Ø323mm × 100mm	12.7in × 4in
Power		
Battery	2 × 12V/155Ah	
Charger (input)	AC100~240V	
Drive motor	Hydraulic	
Others		
Weight	1360kg	2998lb
Forklift pocket	Backward forklift hole	

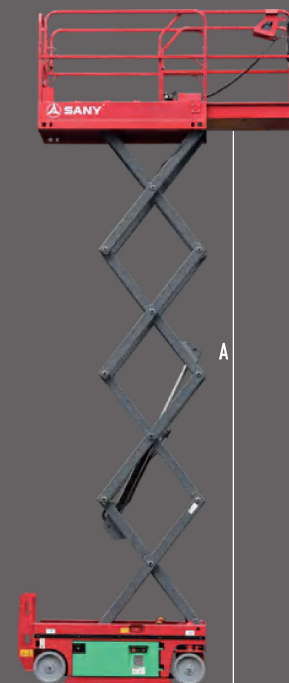

SANY AERIAL WORK EQUIPMENT Co., Ltd

Address: No. 18-688, Industrial Road, Gaoxin District, Wuxing District, Huzhou, Zhejiang Province

Postal code: 313002

Hotline: 400-8878-318

Website: www.sanyglobal.com

Copyright version on 2024 January